


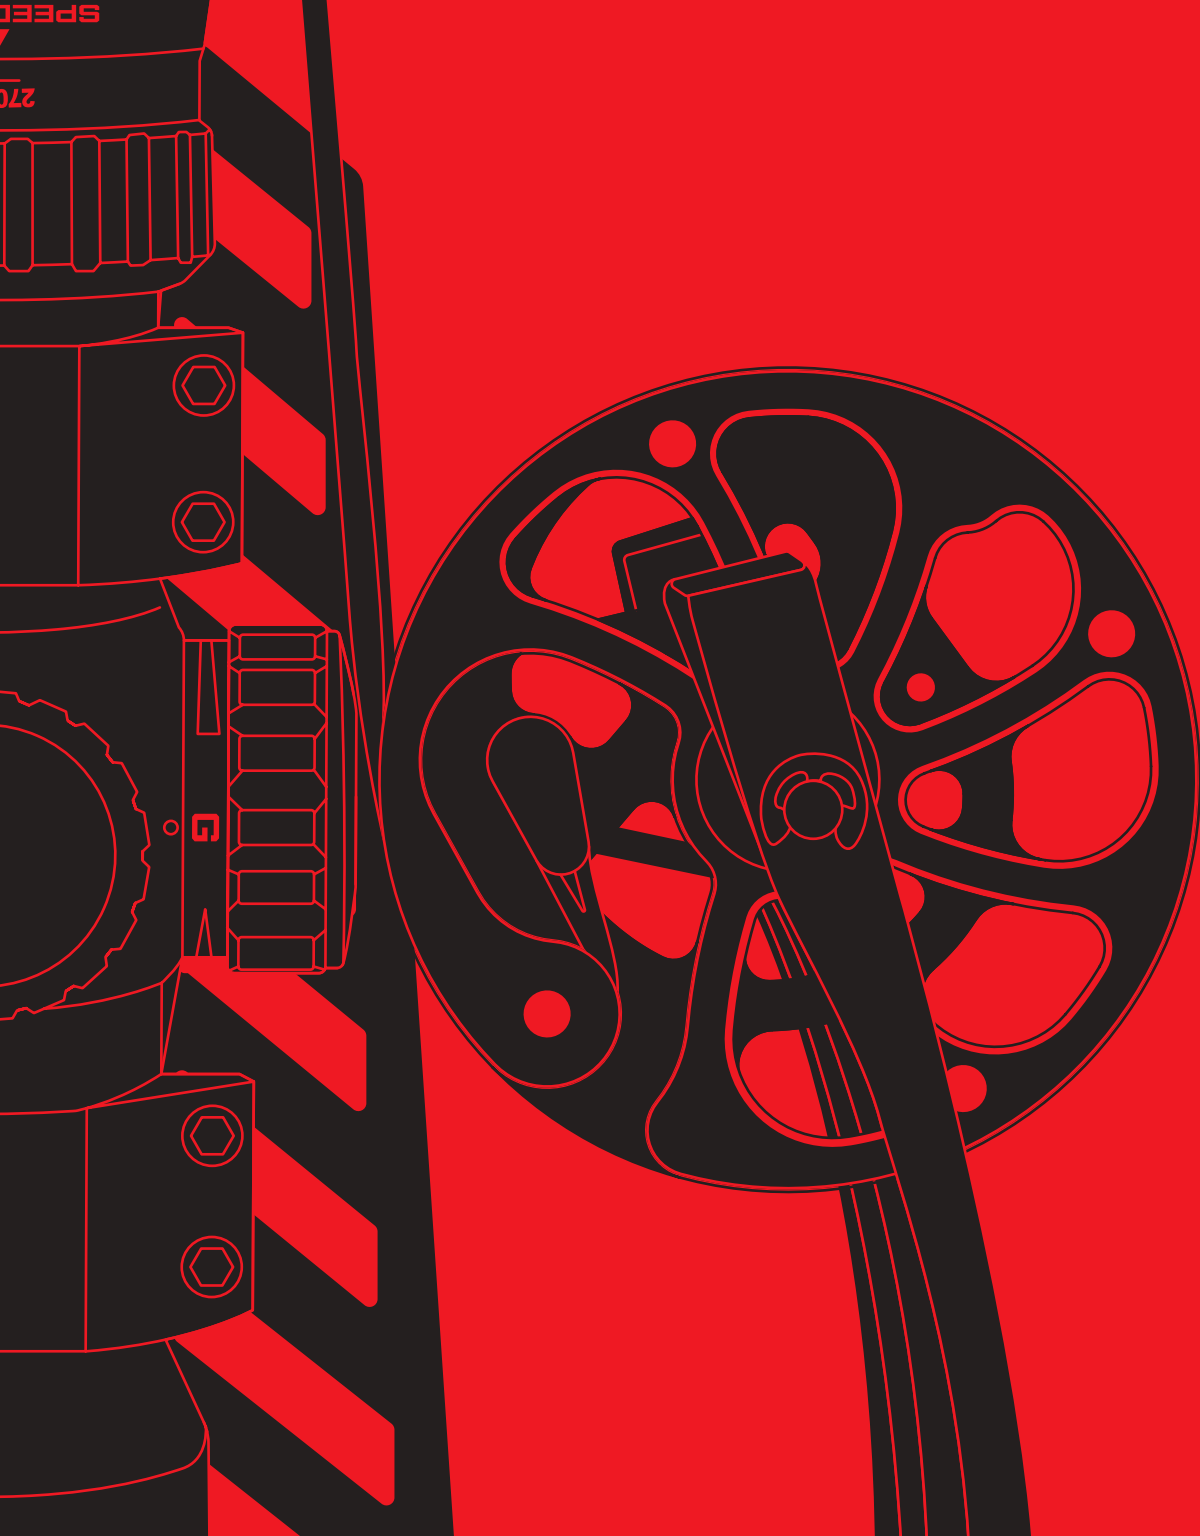


# SWAT X1

SKU 1130

|       |              |        |      |                                                                                    |
|-------|--------------|--------|------|------------------------------------------------------------------------------------|
| 405   | 6.25         | 24.75  | 195  |  |
| FPS   | INCHES       | INCHES | LB   | INCLUDED                                                                           |
| SPEED | AXLE TO AXLE | LENGTH | DRAW |                                                                                    |

6.25" ATA

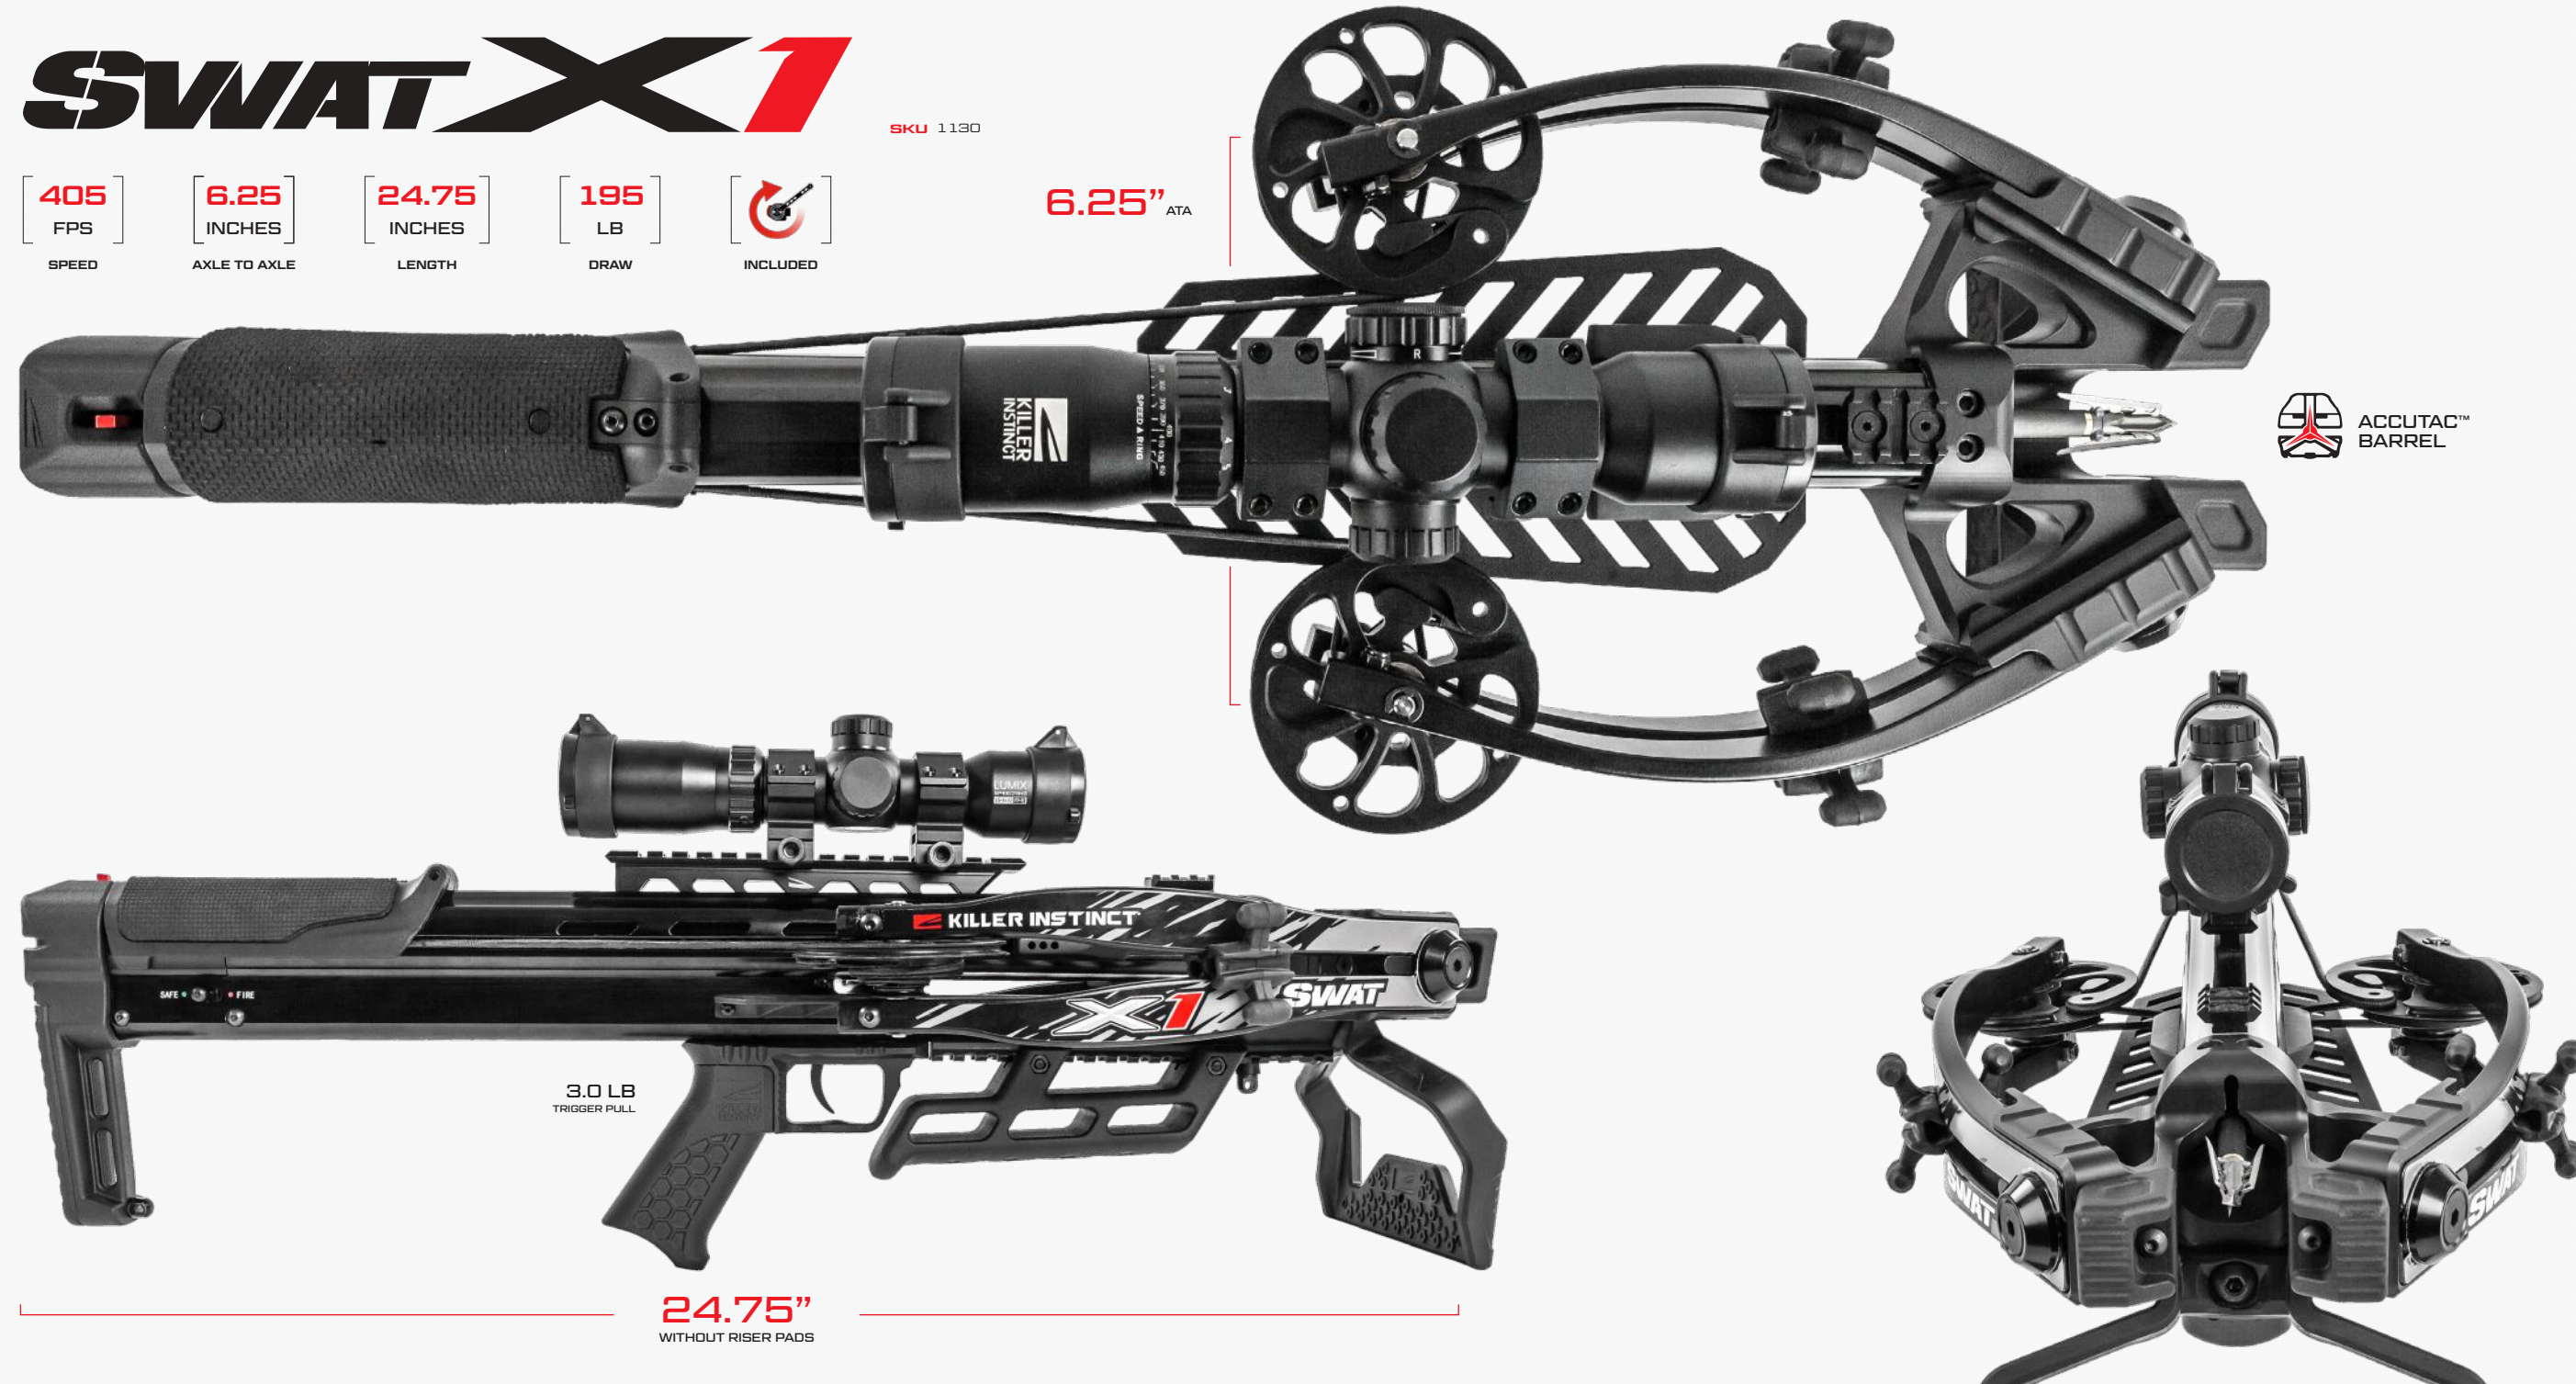

ACCUTAC™  
BARREL

## ACCUTAC™ BARREL

Enclosed 360-degree design provides greater guidance and support to the crossbow bolt, reducing the amount of crossbolt oscillation and improving high speed broadhead flight and accuracy.



## X CAM™

Highly efficient synchronized design with 50% let-off for an easy to cock crossbow that's smoother and quieter on the shot.



24.75"  
WITHOUT RISER PADS



# FATAL X SERIES

|            |              |              |            |                                                                                    |
|------------|--------------|--------------|------------|------------------------------------------------------------------------------------|
| <b>405</b> | <b>6.25</b>  | <b>29.75</b> | <b>195</b> |  |
| FPS        | INCHES       | INCHES       | LB         |                                                                                    |
| SPEED      | AXLE TO AXLE | LENGTH       | DRAW       | INCLUDED                                                                           |



RDC™ INTEGRATED CRANK



29.75"  
TOTAL LENGTH

## RDC™ INTEGRATED CRANK

A built-in crank offers an easier option to draw the crossbow. This system also allows you to draw the crossbow with a rope cocker.



## X CAM™

Highly efficient synchronized design with 50% let-off for an easy to cock crossbow that's smoother and quieter on the shot.





NEW 2022

FUEL 415

RDC™  
RAPID DRAW CRANK

SKU 2106



|                                                |                                                            |                                                   |                                              |
|------------------------------------------------|------------------------------------------------------------|---------------------------------------------------|----------------------------------------------|
| <div>415</div> <div>FPS</div> <div>SPEED</div> | <div>14.75</div> <div>INCHES</div> <div>AXLE TO AXLE</div> | <div>32</div> <div>INCHES</div> <div>LENGTH</div> | <div>210</div> <div>LB</div> <div>DRAW</div> |
|------------------------------------------------|------------------------------------------------------------|---------------------------------------------------|----------------------------------------------|

BURNER 415

SKU 1106-G



MICRO-LITE™  
ALUMINUM BARREL



|                                                |                                                            |                                                   |                                              |                      |
|------------------------------------------------|------------------------------------------------------------|---------------------------------------------------|----------------------------------------------|----------------------|
| <div>415</div> <div>FPS</div> <div>SPEED</div> | <div>14.75</div> <div>INCHES</div> <div>AXLE TO AXLE</div> | <div>31</div> <div>INCHES</div> <div>LENGTH</div> | <div>220</div> <div>LB</div> <div>DRAW</div> | <div>AVAILABLE</div> |
|------------------------------------------------|------------------------------------------------------------|---------------------------------------------------|----------------------------------------------|----------------------|




# BOSS 405

SKU 1104



MICRO-LITE™  
ALUMINUM BARREL

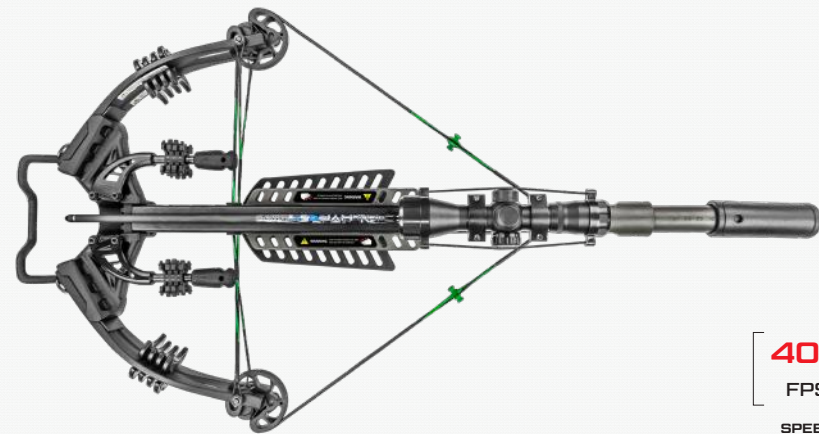

**405**  
FPS  
SPEED

**14.75**  
INCHES  
AXLE TO AXLE


**30**  
INCHES  
LENGTH

**220**  
LB  
DRAW

  
AVAILABLE

# LETHAL 405

SKU 1000

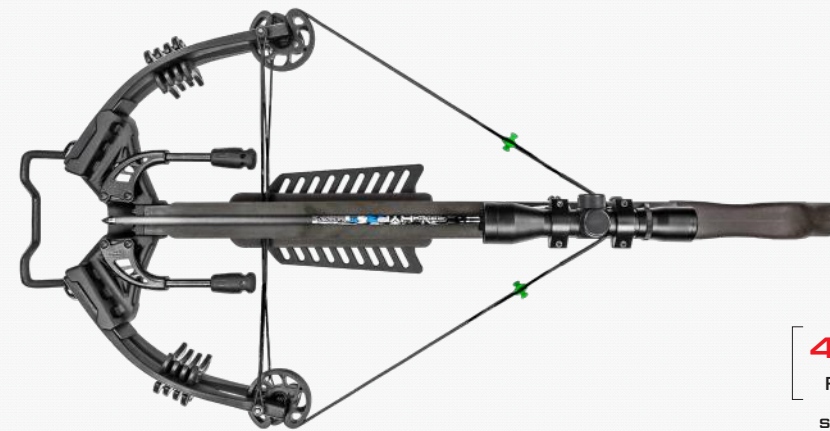

**405**  
FPS  
SPEED

**14.75**  
INCHES  
AXLE TO AXLE

**32**  
INCHES  
LENGTH

**210**  
LB  
DRAW


  
AVAILABLE



# MAX VIEW™ MU-36 CROSSBOW SCOPE

Model 1022

- | 2-7x36 POWER
- | LOCK RING
- | INSTANT 20-110 YARD CALIBRATION UP TO 460 FPS
- | 5 YARD INCREMENTS OUTSIDE 40 YARDS
- | LDC™ RETICLE 20-110 YARDS
- | WATERPROOF, FOGPROOF, SHOCKPROOF
- | PREMIUM FLIP-UP SCOPE CAPS

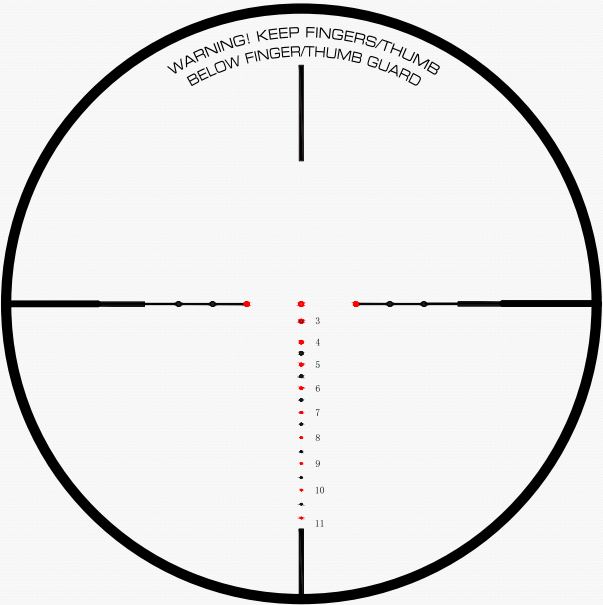

# SPEED RING™ 1.5-5x32 IR-E CROSSBOW SCOPE

Model 1020


- | INSTANT 20-100 YARD CALIBRATION UP TO 450 FPS
- | HD VISION IN LOW LIGHT CONDITIONS
- | GLASS ETCHED KILLZONE XB 100 RETICLE
- | WATERPROOF, FOGPROOF, SHOCKPROOF
- | PREMIUM FLIP-UP SCOPE CAPS



# LUMIX™ 4x32 IR-E CROSSBOW SCOPE

Model 1021

- | CALIBRATED FOR CROSSBOWS OVER 300 FPS
- | HD VISION IN LOW LIGHT CONDITIONS
- | GLASS ETCHED RETICLE WITH MULTIPLE AIM POINTS
- | WATERPROOF, FOGPROOF, SHOCKPROOF
- | PREMIUM FLIP-UP SCOPE CAPS

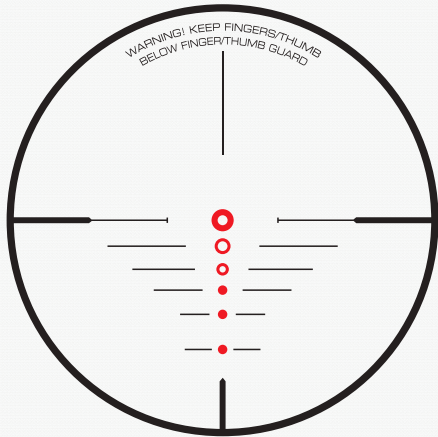



NEW 2022

# KILLERTECH™



## HIGH SPEED CROSSBOW BROADHEADS

- 3-PK | 100 GR | Model 3100
- 3-PK | 125 GR | Model 3125
- 3-PK | 150 GR | Model 3150

- | SPEED-LOK BLADE RETENTION SYSTEM
- | AIRCRAFT GRADE ALUMINUM FERRULE WITH STAINLESS STEEL TIP
- | HEAVY DUTY 420 STAINLESS STEEL BLADES
- | PERFECTLY BALANCED & SPIN TESTED FOR FIELD POINT ACCURACY

**SPEED LOK™**  
BLADE RETENTION SYSTEM

| NO O-RINGS, CLIPS OR RUBBER BANDS

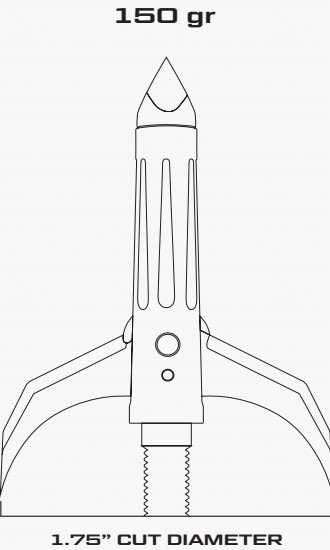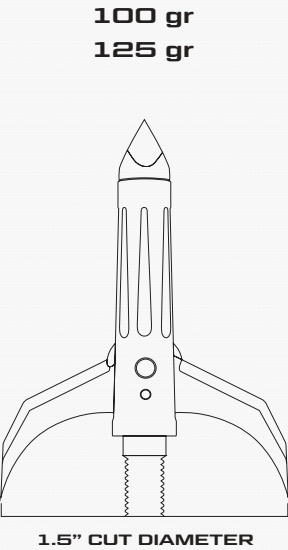





## DEADSTOP™ DECOCKING BOLT

Model 1066

## DEADSTOP™ DECOCKING TIP

Model 1066-1



## HYPR™ KE 20" CROSSBOW BOLTS

36-PK Bulk | Model 1068  
6-PK | Model 1068-6

450 Total Grain Weight with 100 Grain Point



## HYPR™ 20" CROSSBOW BOLTS

36-PK Bulk | Model 1064  
6-PK | Model 1064-6

390 Total Grain Weight with 100 Grain Point



## HYPR™ LITE 20" CROSSBOW BOLTS

36-PK Bulk | Model 1065  
6-PK | Model 1065-6

370 Total Grain Weight with 100 Grain Point




## LIGHTED HYPR™ 20" CROSSBOW BOLTS

3-PK HYPR™ | Model 2064-3



3-PK HYPR™ LITE | Model 2065-3

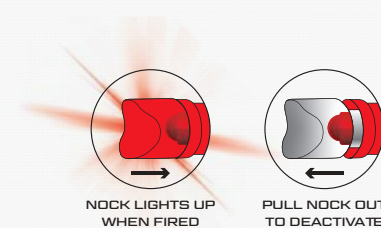





## COMPACT DSC™ CRANK NARROW SLED

Model 2078-1

### COMPATIBLE MODELS:

- FATAL X
- RUSH 380
- BOSS 405
- BURNER 415
- RIPPER 425
- SPEED 425
- FURIOUS PRO 9.5

### NOT COMPATIBLE WITH:

- RIPPER 415
- FURIOUS 370 Series
- FURIOUS Z355
- LETHAL 405
- FIERCE 405
- BC 370
- HERO 380
- SWAT Series
- KI 350
- KI 360
- KI 365
- CHRГ'D 330
- MODELS PRODUCED PRIOR TO 2018

SEE [WWW.KILLERINSTINCTCROSSBOWS.COM](http://WWW.KILLERINSTINCTCROSSBOWS.COM) FOR MODEL COMPATIBILITY



## COMPACT DSC™ CRANK WIDE SLED

Model 2078-2

### COMPATIBLE MODELS:

- LETHAL 405
- FIERCE 405
- BC 370
- BOSS 405
- BURNER 415
- RIPPER 425
- SPEED 425
- HERO 380

### NOT COMPATIBLE WITH:

- RIPPER 415
- FURIOUS 370 Series
- FURIOUS Z355
- FURIOUS PRO 9.5
- SWAT Series
- KI 350
- KI 360
- KI 365
- CHRГ'D 330
- MODELS PRODUCED PRIOR TO 2018

SEE [WWW.KILLERINSTINCTCROSSBOWS.COM](http://WWW.KILLERINSTINCTCROSSBOWS.COM) FOR MODEL COMPATIBILITY



## SINGLE-POINT CROSSBOW SLING

Model 1052-8C

- | ENHANCED AIMING & STEADINESS
- | PERFECT CROSSBOW BALANCE
- | IMPROVED FIELD MANEUVERABILITY
- | MACHINED ALUMINUM PICATINNY RAIL MOUNT




## KI SERIES CRANK

Model 1071

- | COMPATIBLE WITH KI SERIES\* CROSSBOWS & RIPPER 415

\*KI Series 330-365

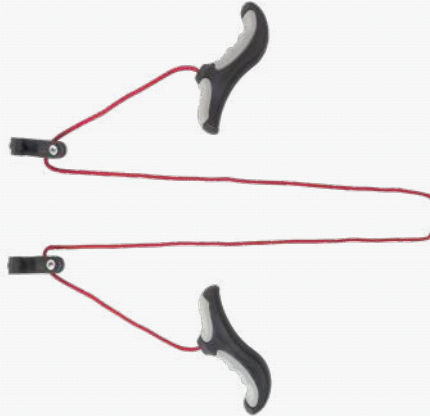

## QUIK-DRAW ROPE COCKER

Model 1073-1

- | INCREASED LEVERAGE FROM COMFORT MOLDED COCKING HANDLES



# ALL GEAR PROTECTION

## SLAYER™ CROSSBOW CASE

Model 1083


- | WEATHER REPELLENT OUTER SHELL
- | INTERNAL QUIVER STORAGE
- | OVERSIZED EXTERNAL ACCESSORY POUCHES
- | FITS WIDER KILLER INSTINCT CROSSBOWS



## 36" NARROW CROSSBOW CASE

Model 2083

- | FITS FATAL SERIES OR NARROW AXLE TO AXLE CROSSBOWS
- | INTERNAL QUIVER STORAGE
- | OVERSIZED EXTERNAL ACCESSORY POUCHES
- | WEATHER REPELLENT OUTER SHELL

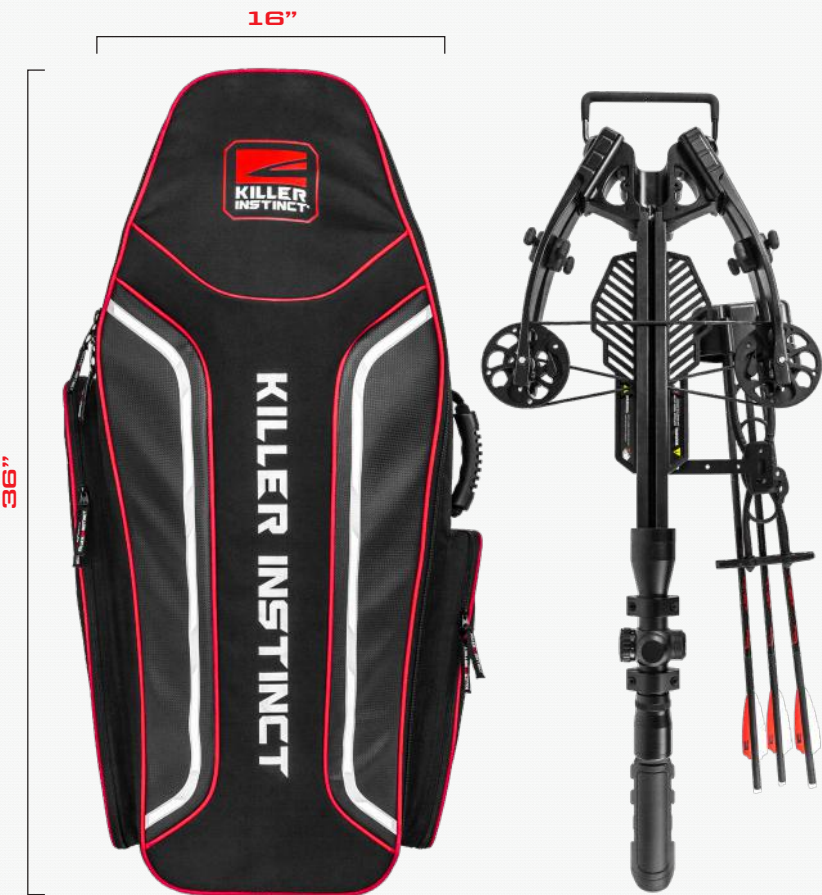

## 25" NARROW CROSSBOW CASE

Model 2082

- | FITS SWAT X1 CROSSBOW
- | INTERNAL QUIVER STORAGE
- | OVERSIZED INTERNAL ACCESSORY POUCHES
- | WEATHER REPELLENT OUTER SHELL





# INTENSE

VERTICAL BOW CARBON ARROWS

- | FOR VERTICAL BOWS
- | 100% CARBON CONSTRUCTION
- | LASER SORTED FOR STRAIGHTNESS
- | PREMIUM VANES
- | NOT FOR USE WITH CROSSBOWS

## INTENSE™ SELECT .001" Straightness

Available in 340, 400 & 500 Spine

- 6-PK | 340 Spine | 8.5 GPI | Model 4341-6
- 6-PK | 400 Spine | 7.25 GPI | Model 4401-6
- 6-PK | 500 Spine | 6.39 GPI | Model 4501-6



## INTENSE™ MX .003" Straightness

Available in 340, 400 & 500 Spine

- 6-PK | 340 Spine | 8.5 GPI | Model 4343-6
- 6-PK | 400 Spine | 7.25 GPI | Model 4403-6
- 6-PK | 500 Spine | 6.39 GPI | Model 4503-6



## INTENSE™ .005" Straightness

Available in 340, 400 & 500 Spine

- |                                            |                                                          |
|--------------------------------------------|----------------------------------------------------------|
| 6-PK   340 Spine   8.5 GPI   Model 4340-6  | Pre-Cut 3-PK   340 Spine   30"   8.5 GPI   Model 4340-3  |
| 6-PK   400 Spine   7.25 GPI   Model 4400-6 | Pre-Cut 3-PK   400 Spine   29"   7.25 GPI   Model 4400-3 |
| 6-PK   500 Spine   6.39 GPI   Model 4500-6 | Pre-Cut 3-PK   500 Spine   28"   6.39 GPI   Model 4500-3 |







| SPEED   | AXLE TO AXLE  | LENGTH | WEIGHT | DRAW WEIGHT | POWER STROKE | KINETIC ENERGY | CRANK    | OPTIC                        | BOLTS      |
|---------|---------------|--------|--------|-------------|--------------|----------------|----------|------------------------------|------------|
| 405 FPS | 6.25" - 9.75" | 24.75" | 7.2 LB | 195 LB      | 13.25"       | 142 FT-LB      | INCLUDED | LUMIX™ SPEED RING 1.5 - 5x32 | HYPRT™ 20" |



|         |               |                 |        |        |       |           |          |             |            |
|---------|---------------|-----------------|--------|--------|-------|-----------|----------|-------------|------------|
| 405 FPS | 6.25" - 9.75" | 29.75" - 31.75" | 7.4 LB | 195 LB | 13.5" | 142 FT-LB | INCLUDED | LUMIX™ 4x32 | HYPRT™ 20" |
|---------|---------------|-----------------|--------|--------|-------|-----------|----------|-------------|------------|



|         |               |                 |        |        |       |           |        |             |            |
|---------|---------------|-----------------|--------|--------|-------|-----------|--------|-------------|------------|
| 405 FPS | 6.25" - 9.75" | 29.75" - 31.75" | 6.9 LB | 195 LB | 13.5" | 142 FT-LB | 2078-1 | LUMIX™ 4x32 | HYPRT™ 20" |
|---------|---------------|-----------------|--------|--------|-------|-----------|--------|-------------|------------|



|         |                 |           |         |        |       |           |          |             |                 |
|---------|-----------------|-----------|---------|--------|-------|-----------|----------|-------------|-----------------|
| 415 FPS | 14.75" - 18.75" | 32" - 34" | 7.35 LB | 210 LB | 14.5" | 141 FT-LB | INCLUDED | LUMIX™ 4x32 | HYPRT™ Lite 20" |
|---------|-----------------|-----------|---------|--------|-------|-----------|----------|-------------|-----------------|



|         |                 |           |         |        |       |           |        |             |                 |
|---------|-----------------|-----------|---------|--------|-------|-----------|--------|-------------|-----------------|
| 415 FPS | 14.75" - 18.75" | 31" - 34" | 6.85 LB | 220 LB | 14.5" | 141 FT-LB | 2078-2 | LUMIX™ 4x32 | HYPRT™ Lite 20" |
|---------|-----------------|-----------|---------|--------|-------|-----------|--------|-------------|-----------------|




|         |                 |           |        |        |        |           |        |             |                 |
|---------|-----------------|-----------|--------|--------|--------|-----------|--------|-------------|-----------------|
| 405 FPS | 14.75" - 18.75" | 30" - 33" | 6.7 LB | 220 LB | 13.25" | 134 FT-LB | 2078-2 | LUMIX™ 4x32 | HYPRT™ Lite 20" |
|---------|-----------------|-----------|--------|--------|--------|-----------|--------|-------------|-----------------|



|         |                 |     |        |        |       |           |        |             |                 |
|---------|-----------------|-----|--------|--------|-------|-----------|--------|-------------|-----------------|
| 405 FPS | 14.75" - 18.75" | 32" | 7.2 LB | 210 LB | 14.5" | 134 FT-LB | 2078-2 | LUMIX™ 4x32 | HYPRT™ Lite 20" |
|---------|-----------------|-----|--------|--------|-------|-----------|--------|-------------|-----------------|



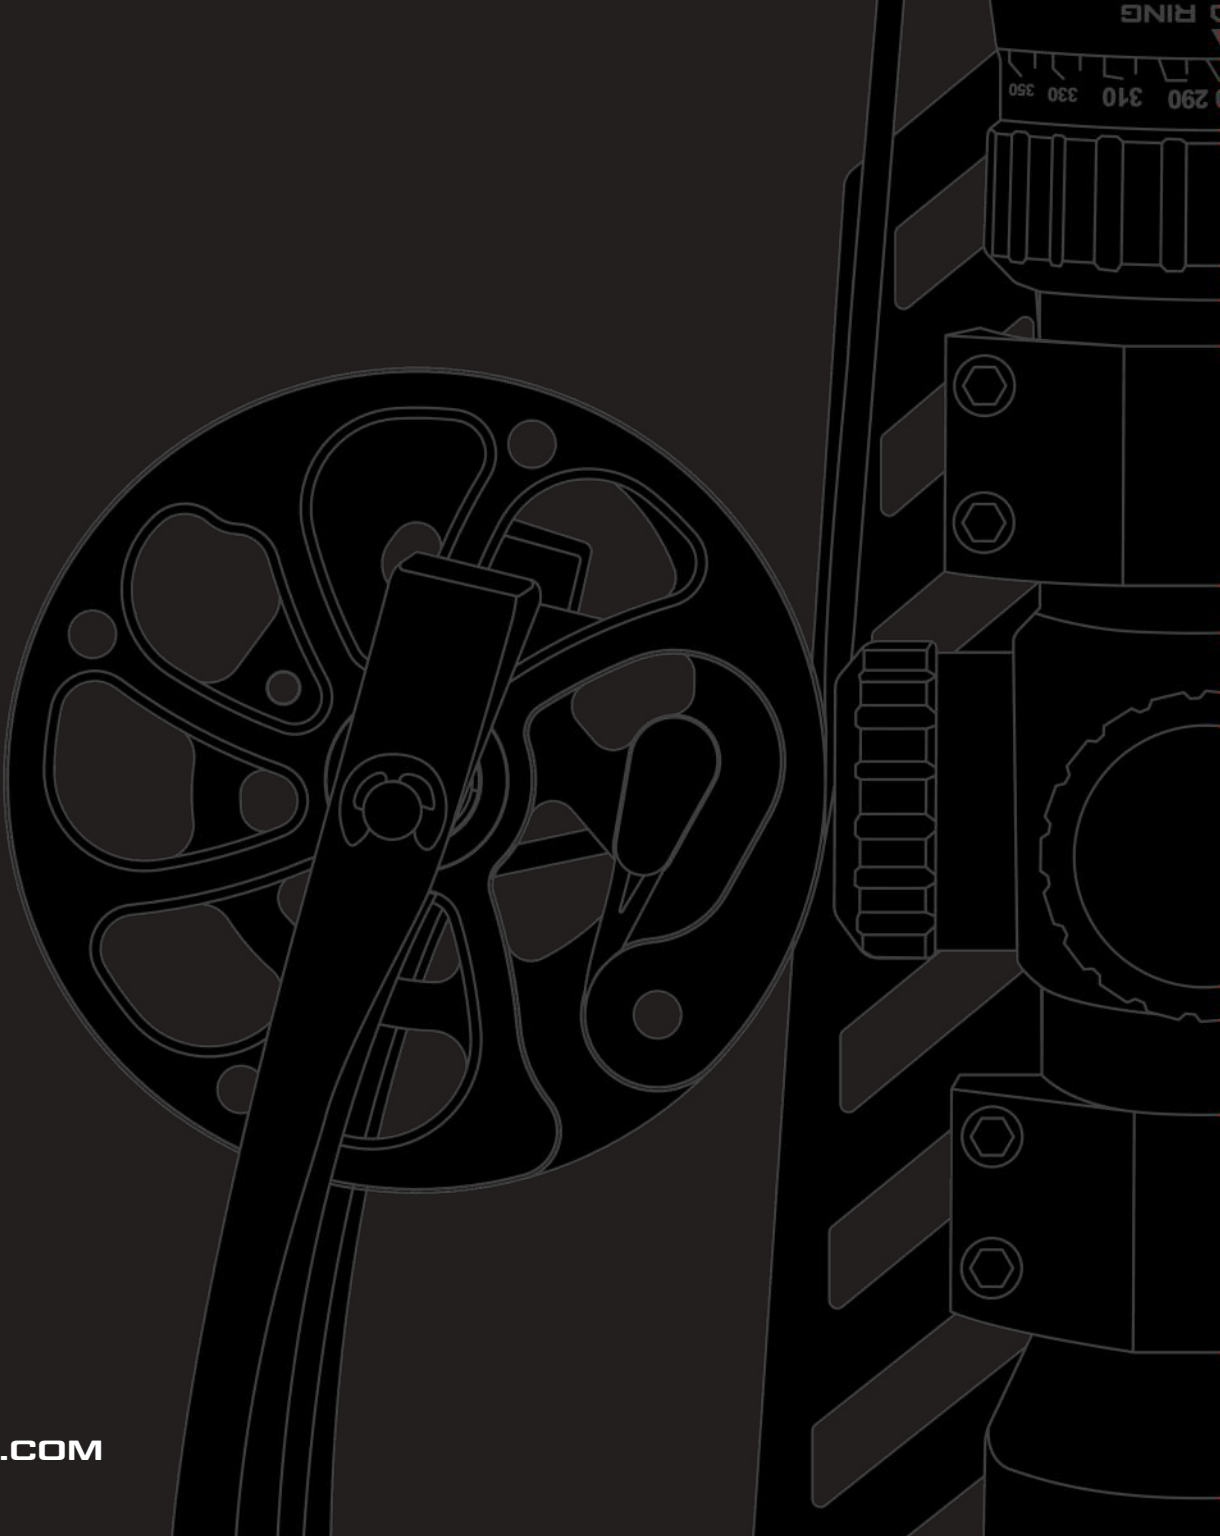

CUSTOMER SERVICE:

**(810) 626 - 3026**

FOR COMPLETE LIST OF PATENTS VISIT:

**KILLERINSTINCTCROSSBOWS.COM**